




Application Instructions for **XTRACTOR VENT[®] XLP TURBO** Continuous Ridge Vent

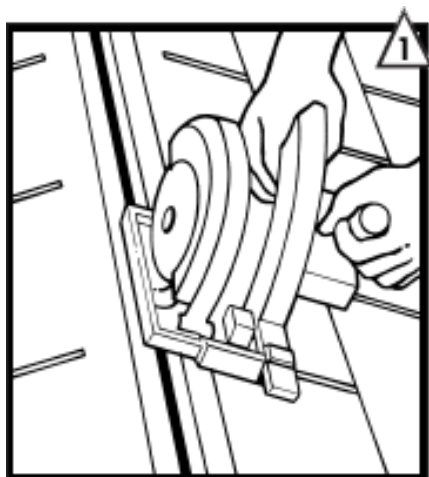

STEP 1. Cut a slot in plywood along the roof ridge 1 1/2" wide (3/4" on each side). If ridge beam is present, cut slot 3/4" wide on each side of ridge beam. Allow for a closed area of sheathing 12" at both ends of ridge.

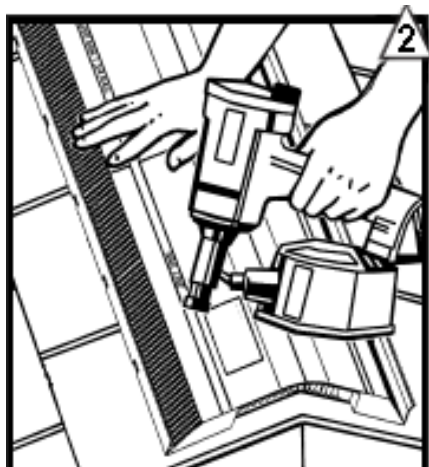

STEP 2. Place beginning female end vent 1" in from gable end and use center line for proper alignment along peak. Fasten using at least two nails at each end and in middle of roll in nail line area (1 3/4" minimum nail length) spacing approximately every 12 inches. More nails may be required on steeper slopes to seat properly. Continue installing additional rolls as needed along ridge sliding female end over male end, aligning using centering line. When reaching the other end, cut vent roll to 1" from gable end and nail in place. End plugs are provided every 6" on the underside of the product.

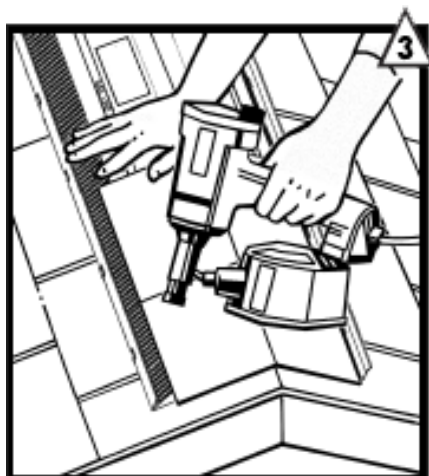

STEP 3. Place first cap shingle over vent so that it overhangs at least 1" over end of vent roll. Install with 1 3/4" nails provided in nail line area as you work your way down the roof. Cut last cap shingle so that it overhangs vent 1" at other gable end.

800-641-4691

**Visit Our Web Site at
tamko.com**

Central District	220 West 4th St., Joplin, MO	64801	800-641-4691
Northeast District	4500 Tamko Dr., Frederick, MD	21701	800-368-2055
Southeast District	2300 35th St., Tuscaloosa, AL	35401	800-228-2656
Southwest District	7910 S. Central Exp., Dallas, TX	75216	800-443-1834
Western District	5300 East 43rd Ave., Denver, CO	80216	800-530-8868